

Air Surround

Ceiling Cassette

A2 Series



R22

Other Advanced Features

- **Self Diagnosis System**


The advanced Daikin Air-Surround is an intelligent air-conditioner with its own self-diagnosis system to detect any malfunction and is indicated through the blinking LED lights.

- **Coil Anti-Freeze Control**

The unit has a self protection system that prevents it from coil frosting. This protects and extends the compressor life span.

- **The Trusted Name In Air-Conditioning**

This unprecedented innovation is brought to you by Daikin - the trusted name in air-conditioning for quality and reliable after-sales-service. With a nationwide service network, Daikin is ever ready to take you to a new dimension in cooling comfort.

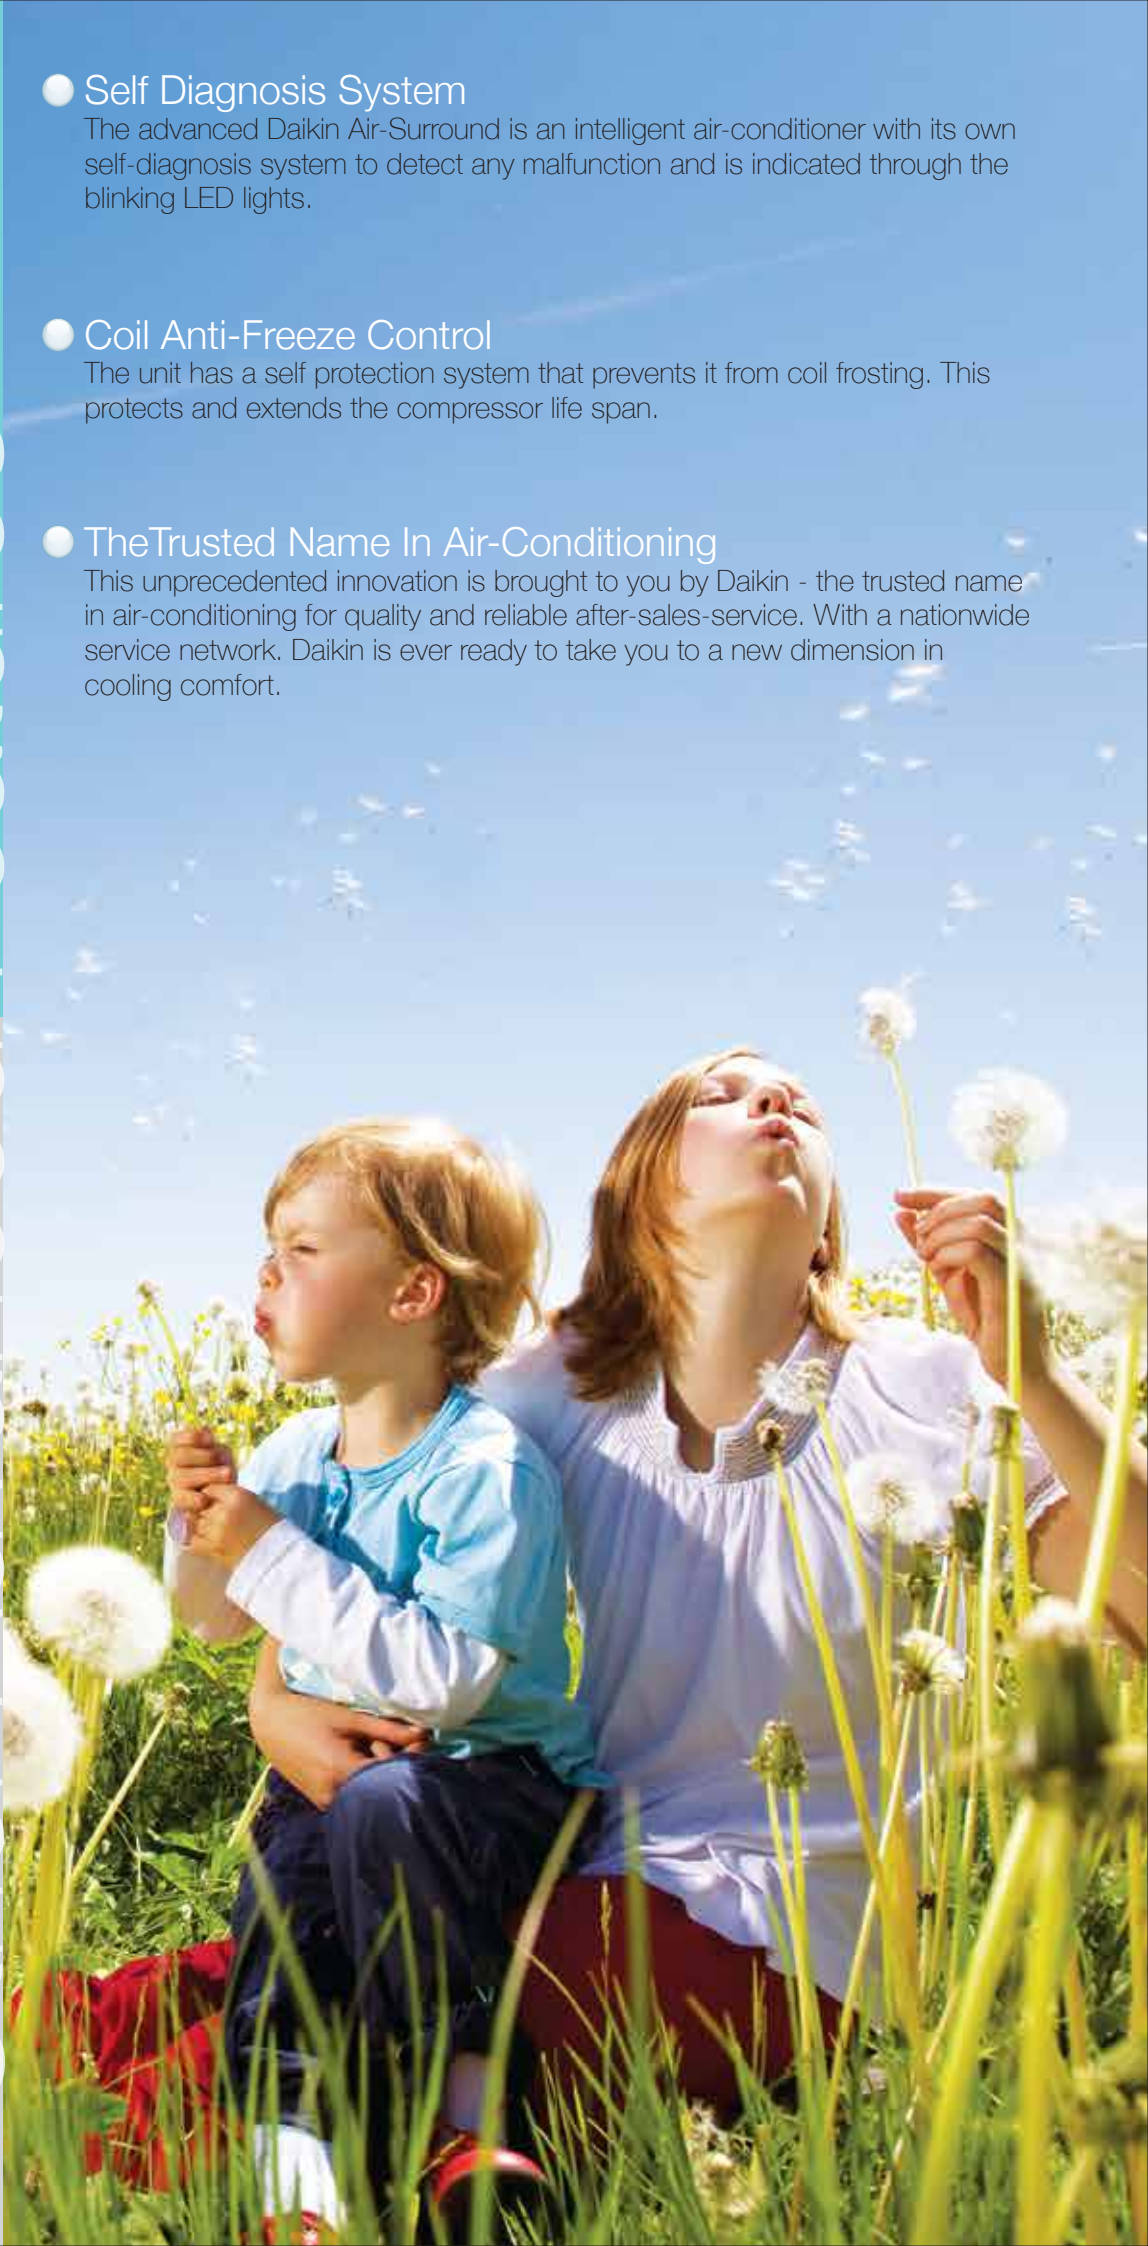

Ceiling Cassette Type - FC-A2 Series

MODEL	INDOOR UNIT		FC30A2V1		FC40A2V1		FC50A2V1
	OUTDOOR UNIT		R28CV1	R30CV1	R35DV1	R40DY1	R50DY1
TOTAL COOLING CAPACITY	Btu/h		28,000	30,000	35,000	40,000	50,000
	W		8,206	8,792	10,258	11,723	14,654
INPUT POWER	W		2,760	3,200	3,360	3,600	4,550
RUNNING CURRENT, 1Ø (3Ø)	A		12.42	14.32	15.79	[6.10]	[7.90]
EER	Btu/hr/W		10.14	9.38	10.42	11.11	10.99
POWER SOURCE	V/Ph/Hz		220-240 / 1 / 50			380-415 / 3 / 50	
REFRIGERANT TYPE / CONTROL	R-22 / INDOOR CAP. TUBE						
INDOOR AIR FLOW	CFM		890		1,030		1,200
SOUND PRESSURE LEVEL	HIGH	dBA	43		47		49
	LOW	dBA	36		40		43
UNIT DIMENSION (WITH PANEL) - HxWxD	INDOOR UNIT	mm	265 x 820 x 820 (345 x 930 x 930)		300 x 820 x 820 (385 x 930 x 930)		
	OUTDOOR UNIT	mm	756 x 855 x 328		852 x 1,030 x 400		
UNIT WEIGHT	INDOOR UNIT	kg	26 + 4		32 + 4		
	OUTDOOR UNIT		57		78	85	88
COPPER PIPE SIZE	LIQUID	mm/in	9.52 / 3/8				
	GAS	mm/in	15.88 / 5/8		19.05 / 3/4		

- 1) ALL SPECIFICATIONS ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE.
- 2) ALL UNITS ARE BEING TESTED AND COMPLY TO INTERNATIONAL STANDARDS SUCH AS ISO 5151 AND AHRI 210/240.
- 3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW:
COOLING – 27°C DB/ 19°C WD INDOOR AND 35°C DB/ 24°C WB OUTDOOR.
- 4) SOUND PRESSURE LEVELS ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION, SOUND PRESSURE LEVEL WILL HIGHER AS A RESULT OF ROOM SPECIFICATION CONDITION.

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Head Office: Tel: 03-7953 8388 Fax: 03-7956 4371

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

- Branches:
- Kedah Tel: 04-730 5670
 - Johor Tel: 07-557 7788
 - Penang Tel: 04-331 1670
 - Pahang Tel: 09-567 6778
 - Perak Tel: 05-548 2307
 - Kelantan Tel: 09-747 4578
 - Negeri Sembilan Tel: 06-768 8969
 - Sabah Tel: 088-722 194
 - Melaka Tel: 06-288 1133
 - Sarawak Tel: 082-333 299

Authorized dealer: