


Ceiling Exposed Series



R22

Ceiling Exposed Product Line Up

Product Line Up

	Indoor Model	Outdoor Model	Capacity Range
TYPE OF REFRIGERANT R22	<ul style="list-style-type: none"> • FH30CBV1L • FH30CBV1M 	 <p>R28-30CV1</p>	3.0 - 6.0 hp
	<ul style="list-style-type: none"> • FH40/50/61CBV1L • FH40/50/61CBV1M 	 <p>R35DV1 R40-61DY1</p>	



The intelligent creation with technology enhancement to save hassles after blackout. The smart choice for pleasure or business.

● Quiet Operation

Indoor noise level is kept at minimal by high efficient indoor fan.

● Last Memory

The unit restarts with the last restored setting when powers resumes.



Superbly Quiet amazingly high Cooling Performer

● Excellent Air Distribution


The front louvers can be adjusted in four different directions giving you the control over the unit's air to suit your preferences.

● Auto Random Restart

It enables the unit to restart automatically at different intervals when power resumes after blackout.

● Strong and Robust

The unit is built of rust resistant material and robust part to ensure long lasting reliable service.

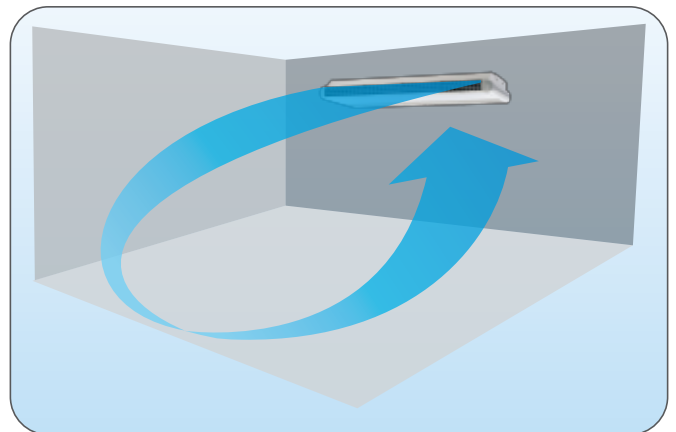



FH-CB Series

Compact And Easy To Use Controller

- > Prominent temperature display.
- > Real time clock display.
- > Easily accessible buttons.
- > Come with wireless or wired controller.
- > Key lock function (DSL8 only)
- > Real-time timer (For DSL8 : 7 days option, 2 events daily)



DGS01
Wireless Controller



DSL8
Wired Controller

Specifications

MODEL	INDOOR	WIRELESS	FH30CBV1L		FH40CBV1L		FH50CBV1L	FH61CBV1L
	OUTDOOR	WIRED	FH30CBV1M		FH40CBV1M		FH50CBV1M	FH61CBV1M
			R28CV1	R30CV1	R35DV1	R40DY1	R50DY1	R61DY1
TOTAL COOLING CAPACITY		Btu/hr	28,000	30,000	35,000	40,000	50,000	61,000
		kW	8.2	8.8	10.3	11.7	14.7	17.9
TOTAL POWER		W	2,840	3,238	3,193	4,171	4,743	6,938
TOTAL RUNNING CURRENT, 1Ø [3Ø]		A	14.6	13.6	15.5	[6.3]	[8.3]	[10.8]
EER		Btu/hr/W	9.86	9.26	10.96	9.59	10.54	8.79
POWER SOURCE		V/Ph/Hz	220 - 240 / 1 / 50			380-415 / 3 / 50		
REFRIGERANT TYPE/CONTROL			R22 / INDOOR CAP TUBE					
INDOOR AIR FLOW		CFM	872		1,050		1,290	1,550
SOUND PRESSURE LEVEL	HIGH	dBA	49		49		54	56
	LOW		44		37		51	49
DIMENSION	INDOOR	(HXWxD) mm	235 x 1,553 x 680			235 x 1,903 x 680		285 x 1,903 x 680
	OUTDOOR	(HXWxD) mm	756 x 855 x 328			852 x 1,030 x 400		
NET WEIGHT	INDOOR	kg	56		65		68	70
	OUTDOOR	kg	57		78	85	88	105
COPPER PIPE SIZE		Liquid (mm/inch)				9.52 / 3/8		
		Gas (mm/inch)	15.88 / 5/8					19.05 / 3/4

1) ALL SPECIFICATIONS ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE.

2) ALL UNITS ARE BEING TESTED AND COMPLY TO ARI 210/240.

3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW:

COOLING - 27°C DB/19°C WB INDOOR AND 35°C DB/24°C WB OUTDOOR.

4) SOUND PRESSURE LEVELS ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION, SOUND PRESSURE LEVEL WILL HIGHER AS A RESULT OF ROOM SPECIFICATION CONDITION.

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Head Office: Tel: 03-7953 8388 Fax: 03-7956 4371

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:

- Kedah Tel: 04-730 5670
- Johor Tel: 07-557 7788
- Penang Tel: 04-331 1670
- Pahang Tel: 09-567 6778
- Perak Tel: 05-548 2307
- Kelantan Tel: 09-747 4578
- Negeri Sembilan Tel: 06-768 8969
- Sabah Tel: 088-722 194
- Melaka Tel: 06-288 1133
- Sarawak Tel: 082-333 299

Authorized dealer: