

R410A


Non Inverter

Floor
Standing
Series



R410A

Floor Standing Product Line Up

	Indoor Model	Outdoor Model	Capacity Range (Btu/hr)
TYPE OF REFRIGERANT R410A	<ul style="list-style-type: none"> • FVN30/40/50/60AV1L 	 <p>RN28/30CV1</p>	28,000-29,000
		 <p>RN35/40/50/61DY1</p>	36,000-55,000

Space saving with style and functionality

Modern And Stylish Design

Daikin floor standing series is designed with stylish profile and classy control panel which could blend in any interior environment.

Turbo Mode

This function is available in COOL and DRY modes. Upon activation, the unit will run at full power with the indoor fan running at high speed for 20 minutes. This will provide a fast cooling for immediate comfort.

Auto Random Restart

In the event of sudden power failure during operation, the system will automatically restarted from the last setting condition. This eliminates the need to restart manually after each power failure.

Aesthetic Black Control Panel

The control panel comes with large button for ease operation. It provides a white LED light for clear display when activated.



White display lights up to indicate modes and temperature settings when activated


KEY LOCK icon is displayed when activated to prevent children or others from tampering with the control buttons on the units

Activation and deactivation of keylock by pressing 'SWING' and 'TURBO' simultaneously for 5 seconds

Far Air Throw

The floor standing is able to achieve air throw distance up to 25m*.

* Note: Based on model FVN60AV1L

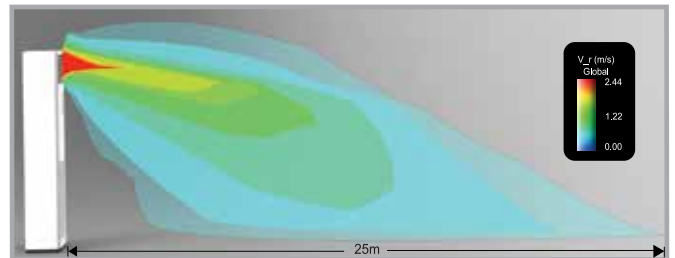

Advanced Ion Plasma Technology For Air Purification

Ion plasma generator remove airborne contaminates from the air we breathe, and thus create a refreshing environment .



Removable Washable Saranet Filter

Removal of airborne dust particles through saranet filter ensures cleaner air supply.



Safety cache for prevention of access to electrical and mechanical parts during removal of filter.

Wireless Remote Controller

Daikin floor standing unit is incorporated with IR sensor for usage with wireless controller.



DGS01 wireless controller

- Prominent temperature display
- Real-time clock display
- Easily accessible buttons

Specification

FVN30AV1L-60AV1L

MODEL	INDOOR UNIT		FVN30AV1L	FVN30AV1L	FVN40AV1L	FVN40AV1L	FVN50AV1L	FVN60AV1L
	OUTDOOR UNIT		RN28CV1	RN30CV1	RN35DV1	RN40DY1	RN50DY1	RN61DY1
TOTAL COOLING CAPACITY	Btu/hr		28,000	29,000	36,000	42,000	45,000	55,000
	W		8,208	8,500	10,550	12,309	13,189	16,120
INPUT POWER	W		2,840	2,900	3,860	4,100	4,900	5,490
RUNNING CURRENT, 1ø[3ø]	A		13.0	13.40	17.10	[6.58]	[8.42]	[9.35]
EER	Btu/hr / W		9.86	10.00	9.33	10.24	9.18	10.02
POWER SOURCE	V/Ph / Hz		220-240 / 1 / 50			380-415 / 3 / 50		
REFRIGERANT TYPE			R410A					
AIR DISCHARGE			DIRECT BLOW (AUTOMATIC LOUVER LEFT & RIGHT)					
AIR FLOW	l/s / CFM		319 / 675		489 / 1,035		489 / 1,035	552 / 1,170
SOUND PRESSURE LEVEL (MEASURED IN SOUND ROOM)	dBA		44		49		50	54
UNIT DIMENSION (H x W x D)	mm		1,850 x 600 x 270		1,850 x 600 x 350			
			753 x 855 x 328		852 x 1,030 x 400			
UNIT WEIGHT	kg		42		45		48	51
			57		71	95	84	105
COPPER PIPE SIZE	LIQUID	mm/in	9.52 / 3/8					
	GAS	mm/in	15.88 / 5/8					19.05 / 3/4
HEAT INSULATION			BOTH LIQUID AND GAS PIPING					

1. DUE TO PRODUCT INNOVATION, ALL SPECIFICATION ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE

2. ALL UNITS ARE BEING TESTED AND COMPLY TO INTERNATIONAL STANDARD ISO 5151

3. NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW :

COOLING - 27°C DB / 19°C WB INDOOR AND 35°C DB / 24°C WB OUTDOOR

4. SOUND PRESSURE LEVELS ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION, SOUND PRESSURE LEVEL WILL HIGHER AS A RESULT OF ROOM SPECIFICATION CONDITION.

5. THE RUNNING CURRENT MEASURED AT SITE MAY VARY FROM THE SPECIFICATIONS STATED

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Call Centre: 1300-88-DAIKIN(324546)

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:

• Kedah	Tel: 04-730 5670	• Johor	Tel: 07-557 7788
• Penang	Tel: 04-331 1670	• Pahang	Tel: 09-567 6778
• Perak	Tel: 05-548 2307	• Kelantan	Tel: 09-747 4578
• Negeri Sembilan	Tel: 06-768 8969	• Sabah	Tel: 088-722 194
• Melaka	Tel: 06-288 1133	• Sarawak	Tel: 082-333 299

Authorized dealer: